


W-M2J403

4 Channels Relay Output with PoE PD Module
(PoE PD Module)



Main Features


- ④ 4-Ch Relay Output
- ④ Support PoE PD
- ④ Operation Time 10ms (Max)
- ④ Communication Protocol: Modbus TCP



Introduction

The W-M2J403 is a 4 Channels Relay Output with PoE PD Module which provides industries who might only need less channels for data acquisition.

Application-From Data Acquisition to Central Management

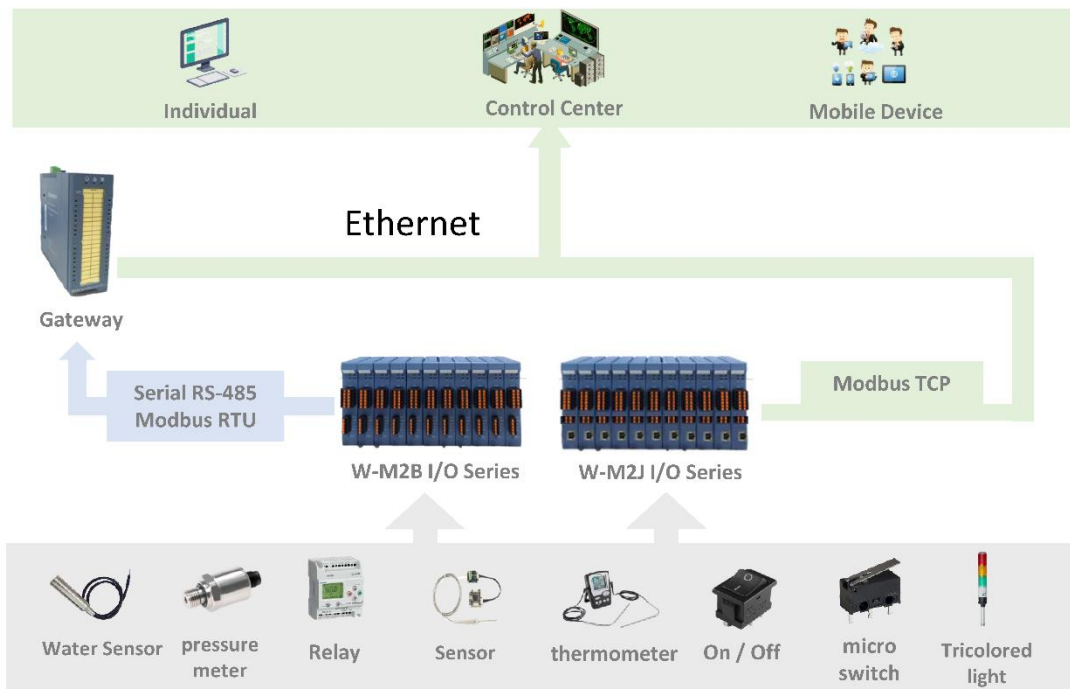

Specification

Model Name	W-M2J403
General	
Power Requirement	18 ~ 75 VDC
Power Consumption	TBD
Temperature (Operating)	-25~70℃
Temperature (Storage)	-30~75℃
Humidity	5~95%
Interface	Ethernet
Communication Protocol	Modbus TCP
Communication Speed	10/100MHz
Communication Distance	TBD
LED Indicators	PWR, Comm, Program, Status
Relay Output	
Output Channels	4 Channels
Relay Output Channels	4 Form C
Contact Rating	5A 250VAC / 30VDC
Dielectric Strength	3KV
Operate Time	10ms Max.
Release Time	5ms Max.
Electrical Endurance	1x105ops@3A
Dielectric Strength	65g (Average)
Dimension	W×H×L = 20mm * 100mm * 95mm
Weight	65g (Average)